AD-A119 626   VIRGINIA UNIV CHARLOTTESVILLE DEPT OF MECHANICAL AND--ETC F/G 13/13
                ON THE OPTIMAL LOCATION OF VIBRATION SUPPORTS.(U)
                1982   B P WANG, W D PILKEY   N00014-75-C-0374
UNCLASSIFIED   A-82-3   NL

| OF |
ADA
1 9626

END
DATE
FILMED
10-82
DTIC

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER A-82-3	2. GOVT ACCESSION NO. AD A119626	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) ON THE OPTIMAL LOCATION OF VIBRATION SUPPORTS		5. TYPE OF REPORT & PERIOD COVERED Technical Report
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) B. P. Wang W. D. Pilkey		8. CONTRACT OR GRANT NUMBER(s) N00014-75-C0374
9. PERFORMING ORGANIZATION NAME AND ADDRESS Department of Mechanical & Aerospace Engineering University of Virginia Charlottesville, VA 22901		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research Arlington, VA 22217		12. REPORT DATE 1982
		13. NUMBER OF PAGES 7
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. (of this report) unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

vibration supports
resonant frequencies
undamped system

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

The problem of optimal positioning of vibration supports to raise the fundamental natural frequency of a system is studied. It is established that for the optimal locations criterion the corresponding lowest antiresonant frequency is a maximum. A numerical example illustrates this criterion.

On the Optimal Location of Vibration Supports

B. P. Wang, W. D. Pilkey
University of Virginia

ABSTRACT

The problem of optimal positioning of vibration supports to raise the fundamental natural frequency of a system is studied. It is established that for the optimal locations criterion the corresponding lowest antiresonant frequency is a maximum. A numerical example illustrates this criterion.

1. Introduction

Intermediate supports are often introduced in engineering structures to increase the resonant frequencies of the system as well as to support weights. These supports, when realized by actual structural components, are elastic supports. Thus, the problem of designing vibration supports to raise the fundamental frequency involves both finding the location and the required stiffness of the supports.

In an earlier paper, Bezler and Curreri [1] studied the design of vibration supports for piping systems. They used the transfer matrix method to study a *spring supported cantilever beam* and a spring supported "L" bend. They found the optimum spring location, i.e., the most effective location to put a spring to increase the fundamental frequency, from numerical experimentation. They concluded that a "near optimal" position for a flexible spring is at a node of the second mode. For a rigid support this would be the optimal location.

In the present paper, a criterion for selecting the optimal spring locations will be derived. This criterion can also be used to compare the relative effectiveness of sets of proposed support locations.

2. Problem Formulation

For a multiple-degree-of-freedom, undamped system with a spring introduced at dof J, the frequency equation is

$$\frac{1}{k} + R_{JJ}(\omega) = 0 \qquad (1)$$

where $R_{JJ}(\omega)$ is the receptance of dof J. Equation (1) can be derived using the receptance method [2]. Alternatively, it can be found by considering the addition of a spring to a system as a local modification [3,4,5]. The receptance $R_{JJ}(\omega)$ can be expressed in modal summation form as

$$R_{JJ}(\omega) = \sum_{\ell=1}^{n} \frac{\rho_{J\ell}^2}{G_\ell (\omega_\ell^2 - \omega^2)} \qquad (2)$$

where ω_ℓ is the natural frequency of the ℓth mode of the unsupported system. $\{\rho_\ell\}$ is the corresponding eigenvector, $\rho_{J\ell}$ is the Jth component of $\{\rho_\ell\}$, and $G_\ell = \{\rho_\ell\}^T [m]\{\rho_\ell\}$ is the generalized mass of the ℓth mode. Thus, for any given spring rate k, Eq. (1) along with Eq. (2) can be used to solve for the new frequencies ω. The natural frequencies of the supported system increase as the spring rate increases. In the limit, as k approaches infinity, i.e., as the support becomes ideally rigid, the frequency equation becomes

$$R_{JJ}(\omega) = 0 \qquad (3)$$

Denote the lowest ω that satisfies Eq. (3) as $a^{(J)}$. Then $a^{(J)}$ is the lowest antiresonant frequency of dof J. That is, $a^{(J)}$ is the highest fundamental frequency achievable when the support at dof J becomes rigid. It follows from the eigenvalue separation property [6], that $a^{(J)} < \omega_2$, where ω_2 is the second natural frequency of the unsupported system. Thus, by choosing dof J for a rigid support as a node in the second mode of the unsupported system, we have $a^{(J)} = \omega_2$, which is the maximum obtainable fundamental frequency. This result has been known for some time [1].

Now consider the case of introducing s springs at dof $J_1, J_2 \ldots J_s$. Following the procedure of Ref. 5, the frequency equation of the supported system is given by

$$\det([I] + [\hat{R}][\Delta K]) = 0 \qquad (4)$$

where   [I] is an sxs identity matrix

[$\hat{R}$] is the receptance matrix associated with the dof
$J_1, J_2, \ldots J_s$, i.e.,

$$\hat{R}_{ij} = R_{J_i J_j} \qquad (5)$$

$$[\overset{\wedge}{\Delta K}] = \begin{bmatrix} \Delta k_1 & & & \\ & \Delta k_2 & & \\ & & \ddots & \\ & & & \Delta k_s \end{bmatrix} = \text{an sxs diagonal matrix}$$

Δk_j is the spring rate of the support at dof j.

In the limiting case when all $\Delta k_j \to \infty$, Eq. (4) becomes

$$\det[R] = 0 \qquad\qquad (6)$$

Let $A^{(J_s)}$ be the lowest root of Eq. (6). Then the optimal support locations will be where $a^{(J_s)}$ is a maximum. We are now in a position to establish a criterion for optimal support locations.

3. Maximum Antiresonant Frequency Criterion

For given sets of support locations, the best set of locations is where the corresponding lowest antiresonant frequency is a maximum.

We will call this criterion the Maximum Antiresonant Frequency Criterion (MAFC). To find the antiresonant frequency, one can either solve an eigenvalue problem of order $(n-s)$ or solve the nonlinear Eq. (6).

4. Numerical Example

To illustrate the basic contention of the MAFC criterion, consider the simply supported beam of Fig. 1. The fundamental frequency of this beam is 15.71 Hz. It is desired to introduce two intermediate supports to increase the fundamental natural frequency to above 25 Hz. For this example it is practical to restrict the support locations to two possible sets of positions, say A $(x_1 = .1L, x_2 = 0.5L)$ and B $(x_1 = 0.34L, x_2 = 0.67L)$.
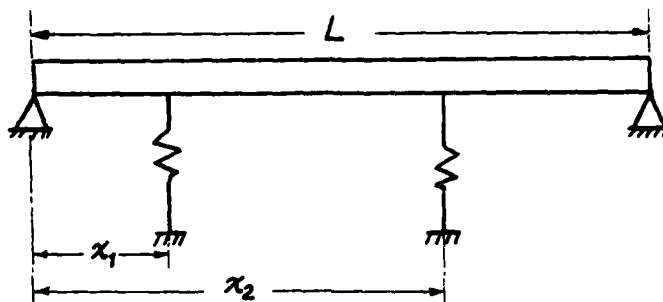
For this case with two supports, we have

$$[\hat{\Delta K}] = \begin{bmatrix} \Delta K_1 & 0 \\ 0 & \Delta K_2 \end{bmatrix} \qquad\qquad (6)$$

and

$$[\hat{R}] = \begin{bmatrix} \hat{R}_{11} & \hat{R}_{12} \\ \hat{R}_{21} & \hat{R}_{22} \end{bmatrix} \qquad\qquad (7)$$

It is convenient to calculate the elements R_{ij} with a modal summation. Thus.

$$\hat{R}_{ij} = R(x_1, x_2)$$

$$= \sum_{\ell=1}^{n} \frac{\rho_\ell(x_1)\rho_\ell(x_2)}{G_\ell(\omega_\ell^2 - \omega^2)} \qquad\qquad (8)$$

$$L = 2.54m \ (100 \ \text{in.})$$

$$E = 69 \ \text{GPa} \ (10^7 \ \text{psi})$$

$$\rho = 8748.73 \ \frac{\text{kg}}{\text{m}^3} \ (0.01 \ \frac{\text{lb-sec}^2}{\text{in}^2})$$

$$I = 4.1623 \times 10^{-6} \ \text{m}^4 \ (10 \ \text{in.}^4)$$

Figure 1   A simply supported beam

where, for a simply supported beam.

$$\rho_\ell(x_1) = \sin \frac{\ell\pi x}{L}$$

$$G_\ell = 1/2 \, \rho L$$

$$\omega_\ell = \frac{(\ell\pi^2)}{L^2} \sqrt{\frac{EI}{\rho}}$$

In the numerical calculation n = 20 is used, or, in other words, 20 modes are used to evaluate the receptances in Eq. (8). The frequency determinant of Eq. (6) gives

$f_1^{(A)}$ = fundamental natural freqency for rigid supports at
  x_1 = 0.1L, x_2 = 0.5L
  = 70.9 Hz

$f_1^{(B)}$ = fundamental natural frequency for rigid supports at
  x_1 = 0.34L, x_2 = 0.67L
  = 180.1 Hz

Since $f_1^{(B)} > f_1^{(A)}$, we conclude that the location pair B is more effective than location pair A in raising the fundamental frequency of the system.

To check the above proposition, we will compute the fundamental frequencies of the spring supported beam for the special case of equal spring rates. The resuls are summarized in Table 1. Alternatively, we can compute the required (equal) spring rates for both springs for given fundamental frequencies. The results are summarized in Table 2. We observe that to raise the fundamental frequency above 25 Hz, springs with rates of about 1.23×10^6 N/m (7000 lb/in) are needed at location x_1 = 0.1L and x_2 = 0.5L, while less stiff springs with rates of 0.88×10^6 N/m (5000 lb/in) are needed if they are located at x_1 = 0.34L, x_2 = 0.67L.

Table 1

Natural Frequencies for Simply Supported Beam with Two Equal Intermediate Springs

Spring Stiffness N/m	(lb/in.)	Fundamental Natural Frequency of the Supported System (Hz)	
		$x_1 = 0.1L$. $x_2 = 50$	$x_1 = 34$. $x_2 = 0.67L$
17513	(100)	15.88	15.95
87565	(500)	16.67	16.88
175130	(1000)	17.38	17.98
350268	(2000)	18.90	20.00
525390	(3000)	20.30	21.81
700520	(4000)	21.61	23.48
875650	(5000)	22.82	25.05
1751300	(10.000)	28.07	31.72
	∞	76.9	180.1

Table 2
Required Spring Rate to Achieve Prescribed Natural Frequency

Fundamental Natural Frequency (Hz)	Required Spring Stiffness (lb/in) for Springs at			
	$x_1 = 0.1L$. $x_2 = 0.5L$		$x_2 = 0.34L$. $x_2 = 0.67L$	
	N/m	(lb/in)	N/m	(lb/in)
16	29238	(166.95)	21220.5	121.17
17	133608	(762.91)	968962.7	553.09
18	244632	(1396.86)	177135	1011.45
19	362386	(2069.24)	262047	1496.3
20	486935	(2780.42)	351610	2007.71
25	1214360	(6934.07)	869482	4964.78
30	2125640	(12137.50)	1505170	8594.61

5. Conclusion

In summary, a simple criterion has been derived that will allow a designer to choose the optimal locations for placing vibration supports. This will narrow the design problem to that of determining the required stiffness to achieve a desired fundamental natural frequency.

Acknowledgment

References

1 Bezler, P., and Curreri, J.R., "Some Aspect of Vibration Control Support Designs," The Shock and Vibration Symposium Bulletin. The Shock and Vibration Information Center, No. 47, Part 2, Sept. 1977, pp. 1-3.

2 Bishop, R.E.D., and Johnson, C.D., The Mechanics of Vibration, 1st ed., The University Press, Cambridge, 1960.

3 Wang, B.P., Palazzolo, A.B., and Pilkey, W.D., "Reanalysis, Modal Synthesis and Dynamic Design," Chapter 8, State of the Art Review of Finite Element Methods, edited by A. Noor and W. Pilkey, ASME, 1981.

4 Wang, B.P., and Pilkey, W.D., "Efficient Reanalysis of Locally Modified Structures," Proceedings of the First Chautaqua on Finite Element Modeling, 1980, Schaeffer Analysis.

5 Wang, B.P., and Chu, F.H., "Effective Dynamic Reanalysis of Large Structures," Shock and Vibration Bulletin, No. 51,

6 Bathe, K.J., and Wilson, E.L., Numerical Methods in Finite Element Analysis, 1st ed., Prentice Hall, New Jersey, 1976, p. 60.

ED

82